

NanoSwitch 4 Ports.

Rugged Airborne Ethernet Switch

etep

4x Ports Gigabit Ethernet Rugged Airborne unmanaged Switch excellent for high-end airborne applications, the NetSwitch/GbE Managed Carrier Ethernet Switch is a highly reliable way to communicate with 10/100/1000 devices in an embedded system, providing four GbE ports with auto-configuration



Hardware Specifications

Ports Type	4 Gigabit Ethernet (10/100/1000 Mbps)
Ethernet Switch Engine	Carrier Grade Ethernet Switch Chipset
Ethernet Connectors	MIL-DLT-38999 Series III Pins
Power Connector	MIL-DLT-38999 Series III (TV P00 ZNCI 09 98 PN)
Input voltage	Wide input range: +16V to +36V DC with Reverse Polarity Protection
Power Consumption	About 4 Watts (1 watt by Ethernet port)
Vibration, Shock, Acceleration	RTCA DO-160G Section 7.2, 7.3 and 8 Cat. S
Altitude	Min: -1500 feet, max: 60,000 feet
MTBF	90 000 Hours (30°C)
Operating Temperature	-45°C to +85°C (DO160 Section 4 Cat. B2)
Storage Temperature	-55°C to 95°C (DO160 Section 4 Cat. B2)
Waterproofness	IP64 / DO160 Section 10 Cat. W
Magnetic Effects, Power Input & Voltage Spikes	DO160 Section 15 Cat. A / Section 16 Cat. Z / Section 17 Cat. A
EMC & Lightning	DO160 Section 18 Cat. Z / 19 Cat. C / 20 Cat. U / 21 Cat. M / 22 Cat. A2XX
Dimensions in mm.	length 135.32 / Width 98.16 / Height 45.14 (without connectors)
Weight ~ Kg [lbs]	≈ 0.650 [1.4]

Key Features

- Four 1000/100/10 Mbps Ethernet ports (MIL-DLT 38999 Serie III connector)
- LED for each Ethernet Port status (10/100/1000)
- Unmanaged Switch
- Passive heat sink included
- Very Low power consumption

NanoSwitch 4 Ports.

Rugged Airborne Ethernet Switch

ETEP is an AS/EN 9100 v2018 & ISO 9001 v2015 certified company - NATO identification code NCAGE: F9281


ETEP, D.T.MUX and D.T.MUX RECORDER are registered trademarks of ETEP Company, registered in the FR.

All other trademarks are the property of their respective companies.

Copyright © 2025 ETEP Company

Image illustrations are the property of ETEP Company



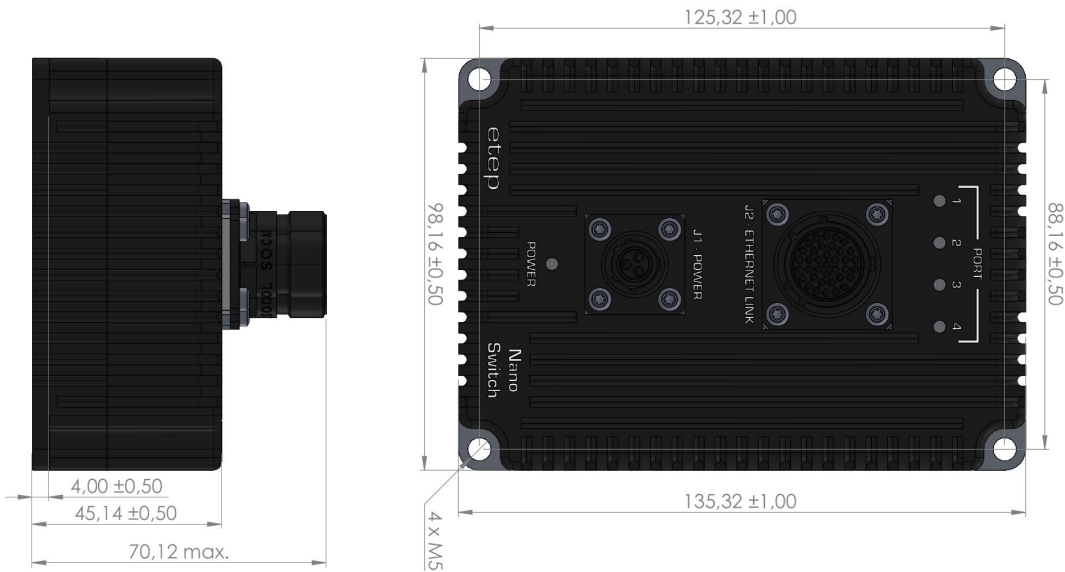

Connectors Pinout

INPUT 28VDC

POWER	J1
-------	----

SOCKET	PLUG
TYPE: SOCKET 3 CONTACTS MALE Manufacturer: AMPHENOL SERIE: MIL-C 38999 SERIE III REFERENCE: TV P00 ZNCI 09 98 P Socket mark: J1 -POWER	TYPE: PLUG 3 CONTACTS FEMALE Manufacturer: AMPHENOL SERIE: MIL-C 38999 SERIE III REFERENCE: TV 06 ZN 09 98 S Cable mark: INPUT 28VDC

Note:

« MM »	AIRFRAME GROUNDING
--------	--------------------

Pin	Signal name	Identification	Color
A	+28VDC AIRCRAFT	+28VA	RED
B	0VDC AIRCRAFT	0VA	BLACK
C	AIRCRAFT GROUNDING	MM	YELLOW

NanoSwitch 4 Ports.

Rugged Airborne Ethernet Switch

ETEP is an AS/EN 9100 v2018 & ISO 9001 v2015 certified company - NATO identification code NCAGE: F9281
ETEP, D.T.MUX and D.T.MUX RECORDER are registered trademarks of ETEP Company, registered in the FR.
All other trademarks are the property of their respective companies.



Gigabit Ethernet Input Pin Contact

etep

ETHERNET LINK J2

PIN VERSION SOCKET	PIN PLUG
TYPE: SOCKET 37 CONTACTS FEMALE Manufacturer: AMPHENOL SERIE: MIL-C 38999 SERIE III REFERENCE: TV P00 ZN CI 15-35 S Socket mark: J2 ETHERNET LINK	TYPE: SOCKET 37 CONTACTS MALE Manufacturer: AMPHENOL SERIE: MIL-C 38999 SERIE III REFERENCE: TV 06 ZN 15-35 P Cable mark:

Pin	Designation	Color		Notes
31	SHIELD	MM		Ethernet Shield port
20	ETH_1	Orange	White	Port : 1 T568B Color
2	ETH_2	Orange		
5	ETH_3	Green	White	
4	ETH_6	Green		
3	ETH_5	Blue	White	
21	ETH_4	Blue		
19	ETH_7	Brown	White	
1	ETH_8	Brown		
36	SHIELD	MM		Ethernet Shield port
16	ETH_1	Orange	White	Port : 2 T568B Color
28	ETH_2	Orange		
18	ETH_3	Green	White	
30	ETH_6	Green		
29	ETH_5	Blue	White	
17	ETH_4	Blue		
15	ETH_7	Brown	White	
14	ETH_8	Brown		
35	SHIELD	MM		Ethernet Shield port
33	ETH_1	Orange	White	Port : 3 T568B Color
23	ETH_2	Orange		
9	ETH_3	Green	White	
24	ETH_6	Green		
7	ETH_5	Blue	White	
8	ETH_4	Blue		
22	ETH_7	Brown	White	
6	ETH_8	Brown		
32	SHIELD	MM		Ethernet Shield port
11	ETH_1	Orange		Port : 4 T568B Color
34	ETH_2	Orange		
27	ETH_3	Green		
13	ETH_6	Green		
26	ETH_5	Blue		
12	ETH_4	Blue		
25	ETH_7	Brown		
10	ETH_8	Brown		

*Pin 37 Additional Ethernet shield

NanoSwitch 4 Ports.

Rugged Airborne Ethernet Switch

ETEP is an AS/EN 9100 v2018 & ISO 9001 v2015 certified company - NATO identification code NCAGE: F9281

ETEP, D.T.MUX and D.T.MUX RECORDER are registered trademarks of ETEP Company, registered in the FR.

All other trademarks are the property of their respective companies.

Copyright © 2025 ETEP Company

Image illustrations are the property of ETEP Company

